

AXIbiperfect GL WB 440 - 460 Wp

High performance bifacial solar module
108 halfcell, glass/glass, N-Type TOPCon


The advantages:

- 30 Years** 30 years Manufacturer's warranty and Performance guarantee
- +30%** Up to 30 % more power output by Bifacial-Technology
- TOP** More performance through innovative N-Type TOPCon-Technology
- PID less** PID reduced through glass/glass-Technology
- Safe** Increased safety through improved fire protection
- + Wp** Positive power sorting from 0-5 Wp



Fig. similar 108TGBLEN241105A

Exclusive linear AXITEC high performance guarantee!

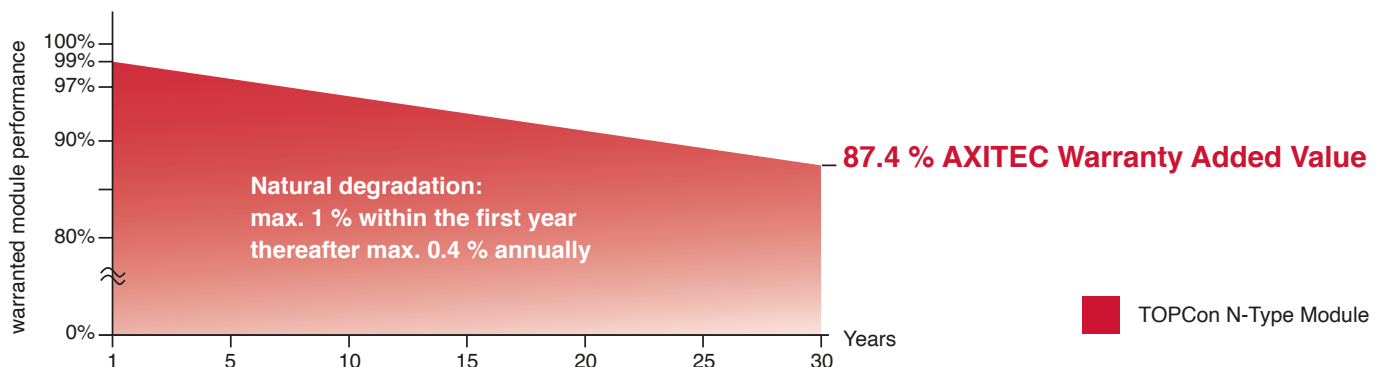

AXIbiperfect GL WB 440 - 460 Wp

Electrical data

at standard conditions (STC): irradiance 1000 W/m², spectrum AM 1.5 at a cell temperature of 25°C

Type	AC-440TGBL/108WB	AC-445TGBL/108WB	AC-450TGBL/108WB	AC-455TGBL/108WB	AC-460TGBL/108WB
Nominal output	440 Wp	445 Wp	450 Wp	455 Wp	460 Wp
Nominal voltage U _{mpp}	32.74 V	32.99 V	33.24 V	33.41 V	33.61 V
Nominal current I _{mpp}	13.44 A	13.49 A	13.54 A	13.62 A	13.69 A
Short circuit current I _{sc}	14.13 A	14.19 A	14.25 A	14.31 A	14.36 A
Open circuit voltage U _{oc}	39.42 V	39.70 V	39.98 V	40.28 V	40.57 V
Module conversion efficiency	22.02 %	22.27 %	22.52 %	22.77 %	23.02 %

at BNPI test conditions: irradiance frontside 1000 W/m², backside 135 W/m², with spectrum AM 1,5 at a cell temperature of 25°C

Nominal output P _{mpp}	485 Wp	491 Wp	496 Wp	502 Wp	507 Wp
Short circuit current I _{sc}	15.58 A	15.64 A	15.71 A	15.77 A	15.83 A
Open circuit voltage U _{oc}	39.42 V	39.70 V	39.98 V	40.28 V	40.57 V

Bifacial coefficients: ϕU_{oc} 0,98±5%; ϕI_{sc} 0,80±10%; ϕP_{mpp} 0,80±10%

Design

Frontside	1.6 mm low-reflection white glass
Backside	1.6 mm glass, cell spaces white
Cells	108 N-Type TOPCon bifacial high efficiency cells
Frame	30 mm black aluminium frame

Mechanical data

L x W x H	1762 x 1134 x 30 mm
Weight	22.0 kg with frame

Mechanical load

Design load (pressure/suction) 3600 Pa / 1600 Pa *

Test load (pressure/suction) 5400 Pa / 2400 Pa *

* depending on the type of installation according to the installation instructions

Power connection

Socket	Protection Class IP68, 3 bypass diodes
Wire	approx. 1.2 m, 4 mm ²
Plug-in system	IP68, MC4-EVO 2, MC4-EVO 2A, JM608

Limit values

System voltage	1500 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	30.0 A

Permissible operating temperature	-40°C to 85°C / -40°F to 185°F
Fire class / Protection class	C (UL790) / II
Hail resistance	HW3 (Ø 30 mm, 23.6 m/s)

(No external voltages greater than U_{oc} may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1.5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0.26 %/K
Current I _{sc}	0.046 %/K
Output P _{mpp}	-0.31 %/K

Low-light performance without Bifacial-effect

(Example for 460TGBL/108WB)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	2.80 A	32.35 V
400 W/m ²	5.64 A	32.72 V
600 W/m ²	8.43 A	32.97 V
800 W/m ²	11.15 A	33.26 V
1000 W/m ²	13.69 A	33.61 V

Packaging

Module pieces per pallet	36
Module pieces per HC-container	936

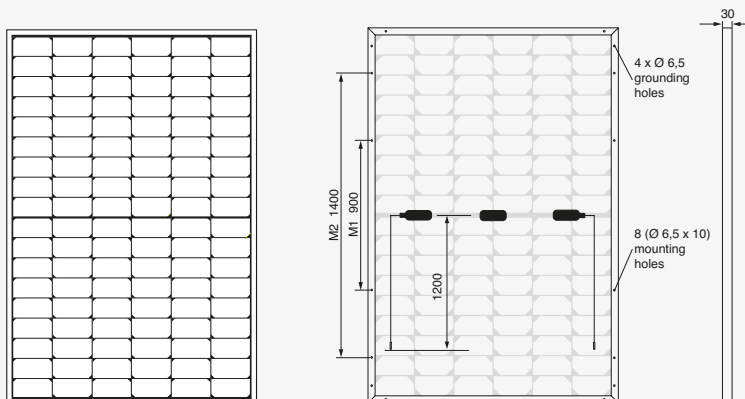


Fig. principle sketch

All dimensions in mm

